
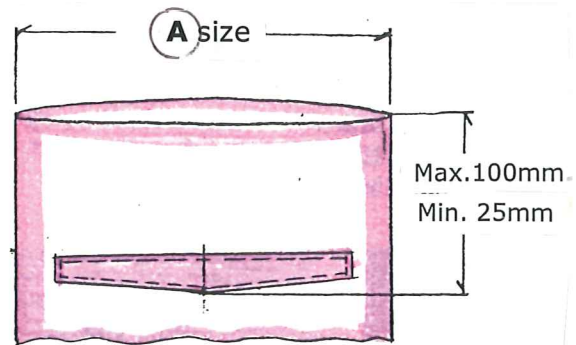


SPECIFICATIONS

HEM-WIDTH & -PIECE SIZE

Ⓐ size 175mm Ⓑ size 120mm

195mm	140mm
215mm	160mm

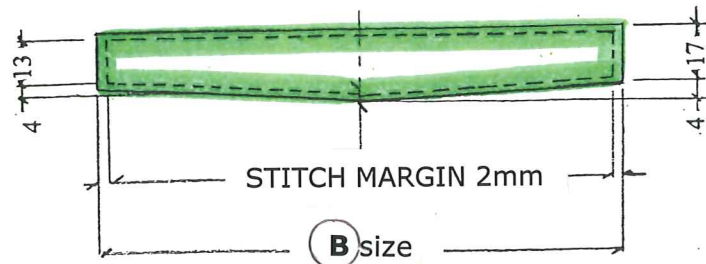

YUHO

[MAIN DEVICE]

- FOLDER (3-DIRECTIONS)
- HALF-ROTOR CLANK
- "LED" TOUCH PANEL
- PATTERN GAUGE
- BOBBIN COUNTER
- T.B.D.
- AIR GUN

[SPECIFICATIONS]

- ◆ MACHINE HEAD: JUKI DSU-142-7 (SINGLE NEEDLE LOCK-STITCH)
- ◆ MACHINE MOTOR: XC-GMF 20-05 (MITSUBISHI LIMI-SERVO)
- ◆ NEEDLE: DP X 17 #14
- ◆ FEED MOTOR: XY ORIENTAL PULSE MOTOR
- ◆ LOADING PLATE HEIGHT: 1,110mm
- ◆ POWER SUPPLY: 200V/ac 650VA
- ◆ AIR SUPPLY: 0.4MPa 2ℓ/min
- ◆ FLOOR SPACE: L/600 X W/550 X H/1500mm

[PRODUCTIVITES]

- ONE CYCLE 15 sec
1,500 seam per 8 H
(ALLOWANCE 20%)

Appearance & Specifications are allowable for Modification ---without Notice !

YUHO SEWING MACHINE CO., LTD.

5-chome 3-1, Biwajima,
Nishi-ku, Nagoya,
Tel: +81-52-522-6276
Fax: +81-52-531-9270
e-mail: yuho@yuhomac.com
URL: <http://www.yuhomac.com>

YUHO

NEW 『 E 』 TYPE
NEW PANT-HEM PROTECTOR
MODEL U-3000-E

NEW



**YUHO NEW HEM PROTECTOR
DON'T REQUEST TIME & SPACE !!**

- ★ NONE CHOICE of working place, due to 「 PORTABLE & COMPACT 」 type.
- ★ NO ONE is refused to make HEM PROTECTOR SEWING easily and quickly !!



YUHO SEWING MACHINE


NEW 『 E 』 TYPE

NEW PANT-HEM PROTECTOR MODEL U-3000-E





ULTIMATELY DESIGNED SMALLEST HEM-PROTECT PIECE

For the smallest Hem-Protect-piece
Size **20 x 120mm** sewing,
mechanisms are minimized to meet to
the smallest Hem width **175mm**
Main cylinder head is equipped with **45mm**,
Hem piece is folded to **3** directions and
the finest top-stitching is allowed.

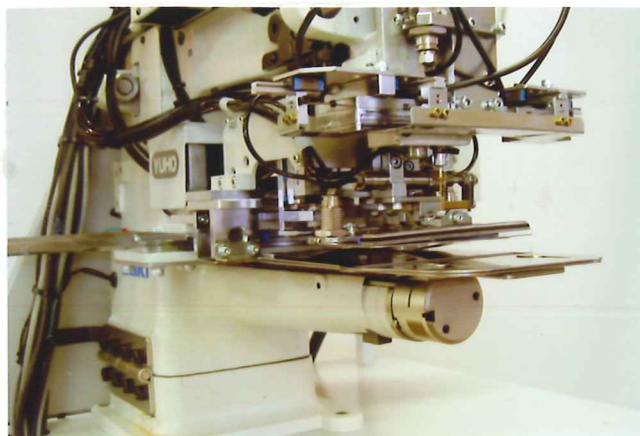

SIMPLIFIED HEM-PIECE SEWING


- ① set Hem-piece to the SLIDING PLATE-GUIDE along to the Center folding line with Iron pressed line accurately. Hem-piece is fixed with Hem-Holder tightly.

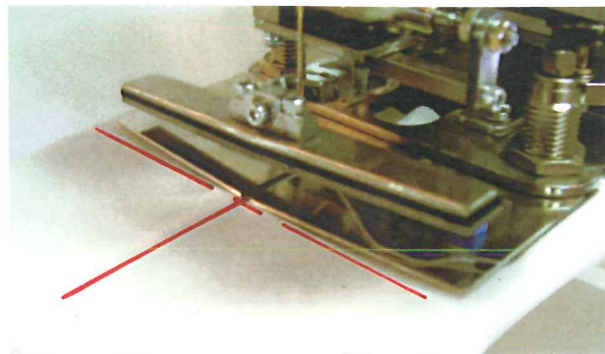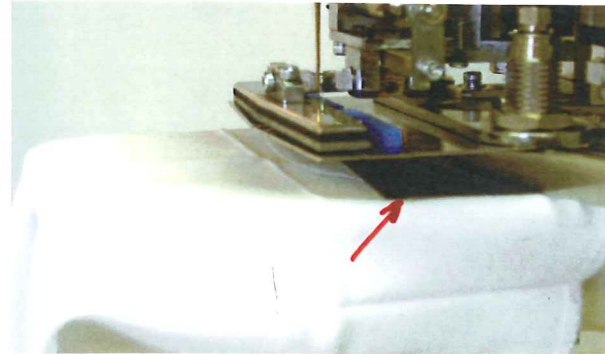


- ② load a Hem-piece on the SLIDING PLATE ----PRESSER PAT goes down and holds down.



- ③ FOLDER goes down and holds to **3** directions completely.

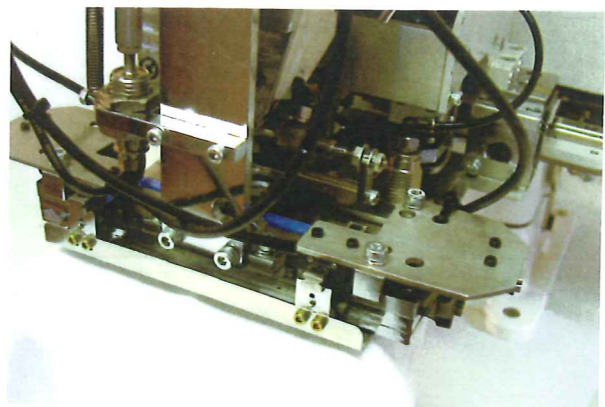

- ④ PRESSER PAT holds down Hem-piece and Top-stitching starts to **4** directions automatically.

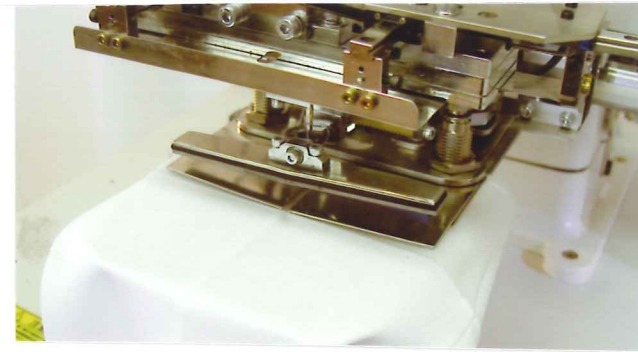

- ⑤ available to set the Hem-piece to the limited small space.

HIGH FIDELITY & DURABILITY

"X", "Y" FEEDER and other Devices
equipped with LINEA WAY.
FEEDING MOOR equipped with PULSE
MOTOR and MACHINE MOTOR with
SERVO MOTOR allows to adjust Sewing
Pitch freely.
High Fidelity and Durability of the Unit
performs the consistent Top-stitching.



SIMPLIFIED "LED" TOUCH PANEL

available Auto **3**-directions Folding and
4-directions Top-stitching is programmed.
When Stitch-margin correction is required,
just enough with the Panel touching.
TBD detection makes Sewing stop
instantly and available re-sewing start.
When threading, Hem Folder goes down
and makes threading easier..

