

**NEW 『D』 TYPE**  
**AUTO SKIRT SERGING MACHINE**  
**MODEL U-2608-D/S2**

**YUHO**

**SPECIFICATIONS**

- ◆ MACHINE HEAD: JUKI MO-6904S
- ◆ MACHINE SPEED: 8,000rpm (Max)  
( NORMAL 6000rpm LOW 2400rpm )
- ◆ SEWING SIZE: 750 X 1500mm
- ◆ AVAILABLE WEIGHT: ~ 230g
- ◆ FABRIC FEEDING: ROLLER by PULSE MOTOR  
AUTO CHANGE SPEED (HIGH/MEDIUM/LOW)
- ◆ NEEDLE: DCX27 #14
- ◆ TABLE HEIGHT: 900mm
- ◆ POWER SUPPLY: 200V/AC 3PH. 650VA
- ◆ AIR SUPPLY: 5kg/cm<sup>2</sup> 30Nℓ/min
- ◆ FLOOR SPACE: W/1800 x D/1100 x H/1150mm

**DEVICES**

- FABRIC FEEDING ROLLER  
3 STAGED AUTO CHANGE SPEED
- 4 FABRIC PHOTO-SENSORS
- ORIGINAL EDGE-GUIDE
- SUSPENDING FABRIC PRESSER
- FABRIC INSERTING AIR
- AUTO CORNER TURNING DEVICE
- THREAD-CHAIN & TRIMMER
- CLAMPING STACKER
- "LED" DISPLAY PANEL  
(CORNER AUTO-STOP, 1 ~ 4 CORNER))
- FLOATING TABLE AIR
- TEFLON COATED TABLE
- AIR GUN

**DAILY OUTPUT**

- 1 CYCLE 25sec. 1,000pcs. / 8H  
(ALLOWANCE: 20%)


**YUHO SEWING MACHINE CO., LTD**

5-chome 3-1, Biwajima,  
Nishi-ku, Nagoya,  
Tel: +81-52-522-6276  
Fax: +81-52-531-9270  
e-mail: yuho@smile.ocn.ne.jp  
<http://www4.ocn.ne.jp/yuhoco/>

**YUHO**

**NEW 『D』 TYPE**  
**AUTO SKIRT SERGING MACHINE**  
**MODEL U-2608-D/S2**

**NEW**

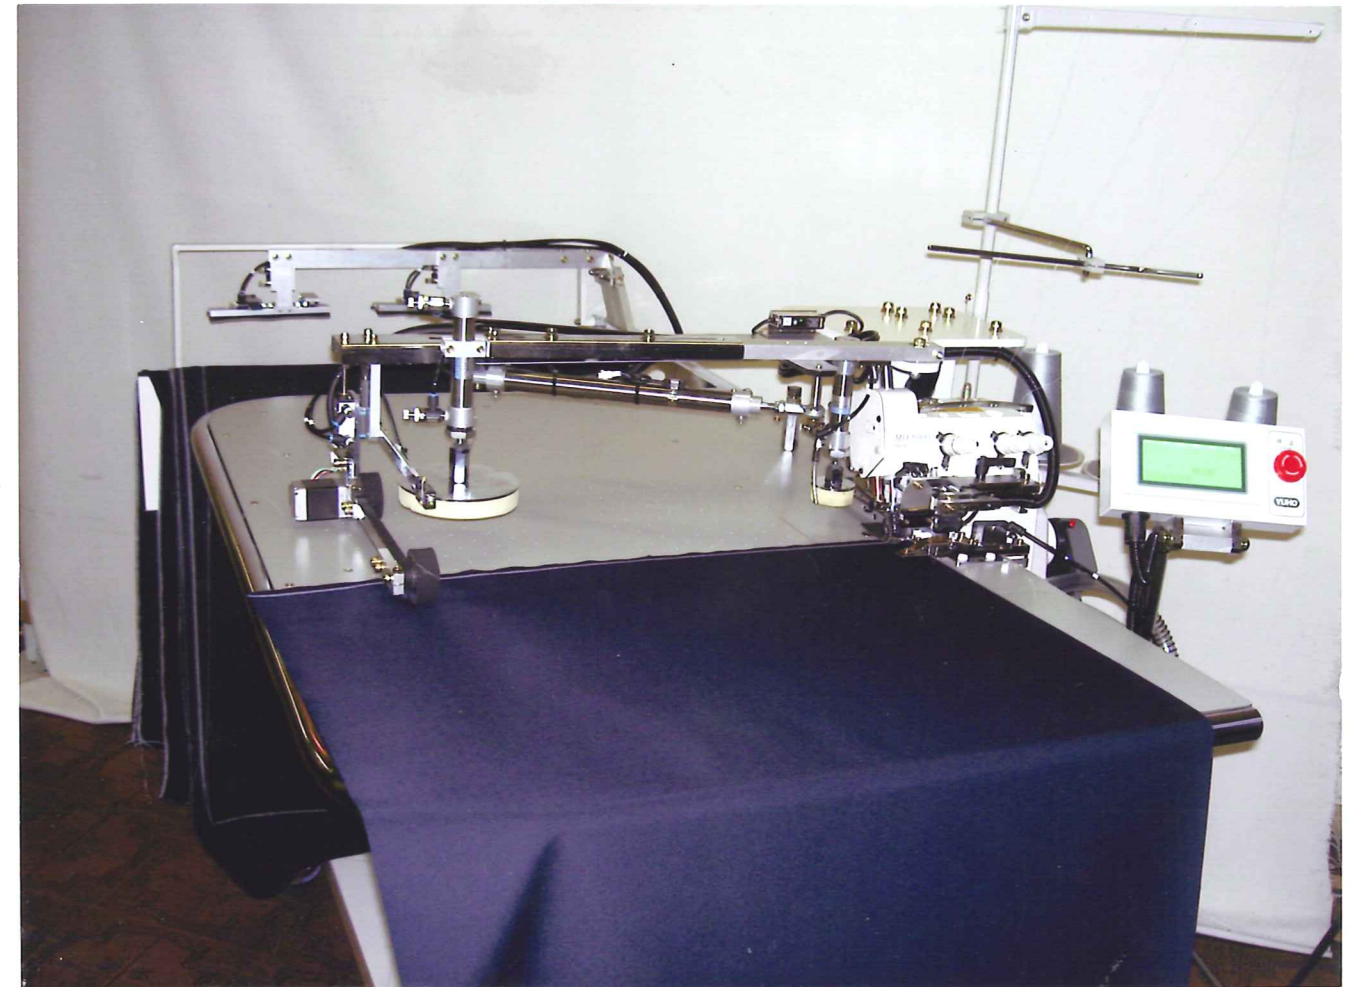

**MODEL U-2608-D/S2 IS APPLICABLE TO BIG SIZE SKIRT FABRIC SERGING, PARTICULARLY FOR LARE PLEATING SKIRTS !!**

**SERGING IS ALLOWED FULL-AUTOMATICALLY AND COMPLETELY STACKING ON !!**


Newly designed " AUTO SKIRT SERGING MACHINE MODEL U-2608-D/S2 " IS JUST ENOUGH TO LOAD THE MACHINE, ALLOWS ALL OF CORNERS SERGING FULL-AUTOMATICALLY. THIS CAN SAVE OPERATOR'S WORKING TIME EXTREMELY TO SUCH BIGGER SIZE PLEATING SKIRT FABRICS. WITH "SINGLE OPERATOR", 2 ~3 UNITS OPERATION IS ALLOWED !!



YUHO SEWING MACHINE



**NEW 『D』 TYPE  
AUTO SKIRT SERGING MACHINE  
MODEL U-2608-D/S2**

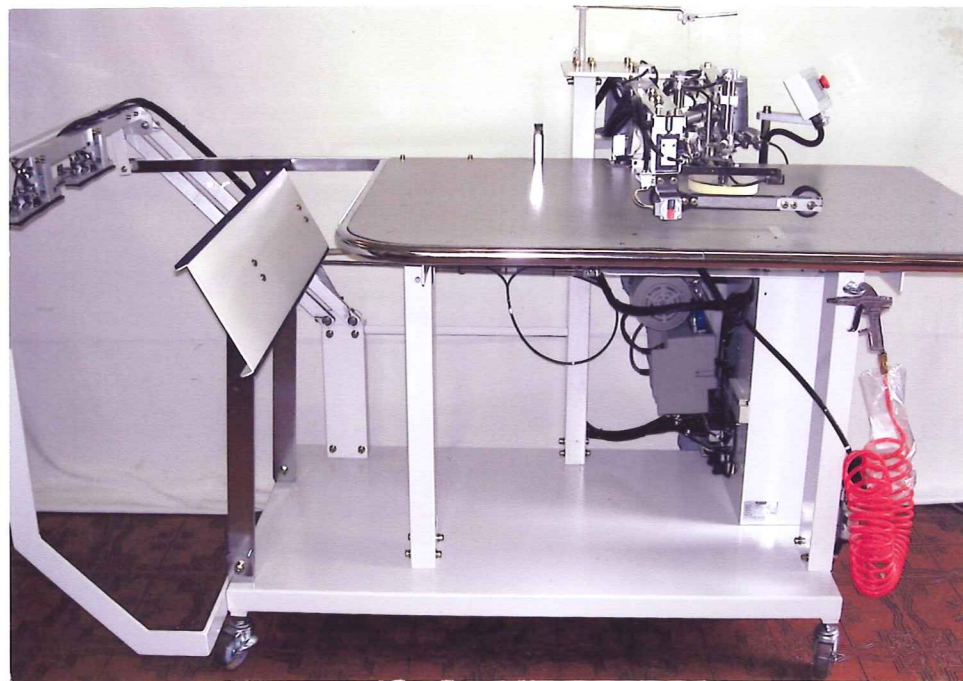


**AUTOMOTIZED WORKING**

Working operation is just enough to load a Skirt fabric on the working table. Loading time is just enough by **20%** in full cycle time. Big balance for **80%** can save working time and provides "High Productivities". 4 Photo-Sensors (A,B,C,D) detects on the Left/Right edges and controls serging completely. **YUHO** originally designed Edge-Guide guides the fabric-edge accurately.


**HIGH SPEED JUKI SERGING MACHINE HEAD MO-6904S**

The latest machine head " **MO-6904S** " is applied. Max serging high speed **8,000rpm** is available and performs high productivities extremely. While, consistent and elegant serging is promised.

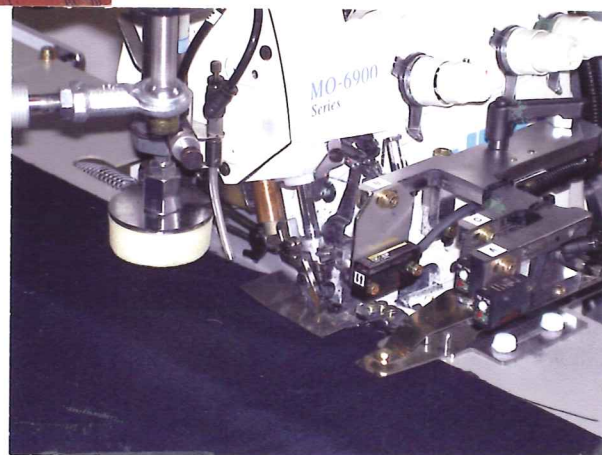

**CORNER AUTO STOPPING SAVES THREAD SPOILING**

With originally designed Needle corner stopping, Needle is sunken and fabric is turned automatically on the corners. This can save " thread spoiling " without any thread-chaining, and promises the finest corner serging finish.

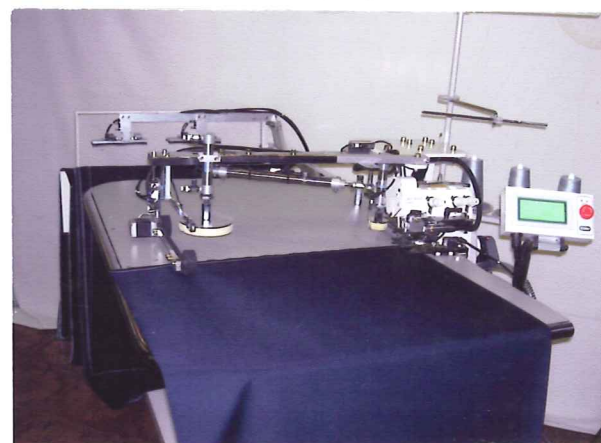

**"LED" DISPLAY PANEL CONTROLLING**

With "LED" Display Panel, Operational Setting is allowed flexibly, simply. Various Inputting or Correction are also allowed quickly, freely. Repairing, Maintenance are also checked easily, quickly.




**FABRIC AUTO-TURNING MECHANISM**

With 2 Presser Pat and Inserting Air, fabric is inserted under the Needle by turning **90°** automatically. Feeding Roller on the leftside keeps on in parallel, and make sure of next "2'nd Corner" serging start.



**TABLE FLOATING AIR**

Table Floating-Air supports Heavier and Bigger fabrics smoothly. Additionally, Teflon coated table supports fabric feeding smoothly.

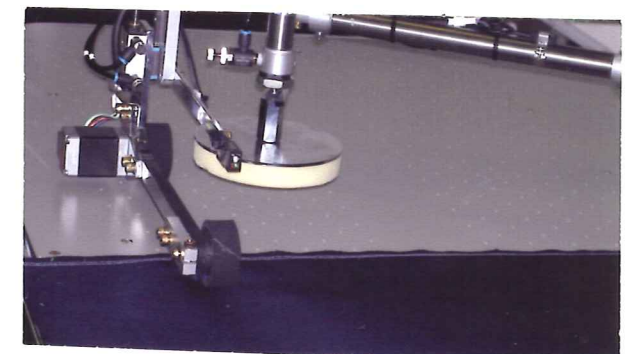

**SYNCHRONIZED FEEDING MECHANISM**

For Synchronized fabric feeding at Left and Right side, Feed-Dog works on the rightside and Feeding Roller works on the leftside to make sychronized smoothly feeding. Feeding Roller feeding speed is convertible "LOW-MEDIUM-HIGH" speed automatically.



**AUTO THREAD-CHAINING & TRIMMING**

Thread-chain is vacuumed automatically while thread-chaining and trimming are adjustable according to sewing modes. While machine is running, trimming keeps clean without any Dusts.



**STOUT CLAMPING STACKER**

Twin Clamper allows rather bigger fabric clamping completely. With Swing-bar, clamped fabric is stacked on completely.